


IP Camera



2020-Q4

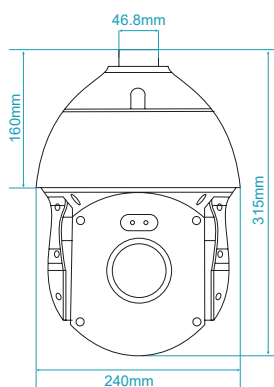

سایر برتریها:

- پشتیبانی از میکرو SD با ظرفیت 256GB
- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

قابلیت‌های هوشمند:

- عبور از خط
- فنس مجازی
- تشخیص حرکت سریع افراد
- اضافه شدن اشیاء
- گم شدن اشیاء
- تشخیص حرکت
- خروج از منطقه
- ورود به منطقه

2 years Silver Guarantee

- دو سال گارانتی نقره‌ای بدون قید و شرط کی تی
- سه سال ضمانت پایداری کیفیت تصویر

Camera	
Image Sensor	3MP Starlight (Sony-Japan) Cmos Sensor (1/2.8")
Case Size	8"
CPU	Dual-Core ARM Cortex-A7@900MHz
Lens	30X Optical Lens (4.7~141mm)
Resolution	2048*1536 (3MP)
Available IR Range	150~160M Smart IR SMD Technology
D/N Filter	IR Cut Filter Switch (ICR)
Min Illumination	Color: 0.002 Lux(AGC on) - B/W: 0.0 Lux(IR on)
PTZ	Pan Range: 360° Endless - Pan Speed: 0.1~240°/S Tilt Range: -10~100° - Tilt Speed: 0.1~180°/S Number of Preset: 255 - Patrol: 4 - Pattern: 8 - Park Action: Yes
StarLight View	Yes-Color
Picture Adjust	
Picture Function	120db WDR, DWDR, BLC, HLC, Defog, ROI, 3D DNR
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265) Smart Event Codec
Audio Compression	G.711A, G.711U
Frame Rate(60Hz)	30fps@960P, 60fps@1080P, 45fps@3MP (WDR ON)
Transmission Stream	Triple Stream (Code Rate: 128kb-10mb)
Network	
Protocols	HTTPs, HTTP, TCP/IP V4-V6, ICMP, RTSP, UDP, NTP, DHCP,DDNS, FTP, SNMP-V1-V2-V3, UPNP, P2P, NAT, Multi Cast
Compatibility	Onvif Ver2.6, Profile S, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Recording Software	Unlimited KDT CMS 128CH Per Monitor
Smart Device	IOS, Android Phone & Tablet

Function	
Recording	FTP, NVR, CMS, NAS, SD Card
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Alarm Out
Intelligent Function	8 Smart Function Line Crossing, Area Intrusion, Fast Moving, Unattended Object, Object Missing, Motion Detection, Region Exiting, Region Entrance
Interface	
Network	RJ45(10/100Mbps)+LED Indicator on Cable
Audio	Audio Out, Audio In
Alarm	Alarm Out, Alarm In
CVBS	Yes
Power	PoE LAN, DC In
Control	N/A
Memory Slot	Yes - Micro SD (256Gb Max) (ANR Support)
General	
IP Rating	IP67, 3KV Surge Protection
Power Supply	AC24V ± 25% (3A Max)
POE Supply	IEEE802.3at-Max 27W(0.57A)
Web Language	English, Persian
Dimension	315*240 mm
Weight	4.440 kg
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-40°C ~ +70°C
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	100K hrs min- MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR