

KI-S200SC80Z32


Smart Curium Series

IP Camera

*نکته: فقط پایه دیواری به همراه محصول ارائه می گردد.



2021-Q2

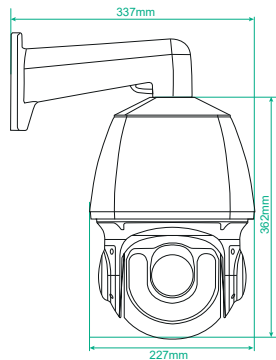

سایر برتریها:

- پشتیبانی از میکرو SD با ظرفیت 256Gb
- بدنه ضد آب و گرد و غبار با درجه IP67
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.4
- قابلیت WDR, BLC, HLC, Defog

قابلیت های هوشمند:

- عبور از خط
- ورود به منطقه
- تشخیص حرکت

2 years Silver Guarantee

- دو سال گارانتی نقره ای بدون قید و شرط کی تی
- سه سال ضمانت پایداری کیفیت تصویر

Camera	
Image Sensor	8MP Starlight (Sony-Japan) Cmos Sensor (1/1.8")
Case Size	8"
CPU	Dual-Core ARM 2 x A53@1400MHZ
Lens	32X Optical Lens (4.7~150.4mm)
Resolution	3840*2160 (8MP)
Available IR Range	150~200M Smart IR SMD Technology
D/N Filter	IR Cut Filter Switch (ICR)
Min Illumination	Color: 0.001 Lux(AGC on) - B/W: 0.0 Lux(IR on)
PTZ	Pan Range: 360° Endless - Pan Speed: 0.1~240°/S Tilt Range: -10°~100° - Tilt Speed: 0.1~180°/S Number of Preset: 255 - Patrol: 4 - Pattern: 8 - Park Action: Yes
StarLight View	Yes-Color
Picture Adjust	
Picture Function	120db WDR, DWDR, BLC, HLC, Defog, ROI
Digital Zoom	16X
Shutter Speed	Manual (1/3 ~ 1/100.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265)
Audio Compression	G.711A, G.711U
Frame Rate(60Hz)	30fps@1080P, 30fps@8MP (WDR ON)
Transmission Stream	Triple Stream (Code Rate: 128kb-16mb)
Network	
Protocols	HTTPs, HTTP, TCP/IP V4-V6, ICMP, RTSP, UDP, NTP, DHCP,DDNS, FTP, SNMP-V1-V2-V3, UPNP, SIP, NAT
Compatibility	Onvif Ver2.4, Profile S, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Recording Software	Unlimited KDT CMS/VMS 128CH Per Monitor

Function	
Recording	FTP, NVR, CMS, NAS, SD Card
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, Snapshot, Recording, Alarm Out
Intelligent Function	3 Smart Function Line Crossing, Entering The Area, Motion Detection
Interface	
Network	RJ45(10/100mbps)
Audio	Audio Out, Audio In
Alarm	Alarm Out, Alarm In
CVBS	Yes
Power	High PoE LAN, DC/AC In
Control	RS485, Joystick Control
Memory Slot	Yes - Micro SD (256Gb Max)
General	
IP Rating	IP67, IK10, 3KV Surge Protection
Power Supply	AC24V ± 25%
POE Supply	IEEE802.3at-Max 57W(1.18A)
Web Language	English, Persian
Dimension	237*362*227 mm
Weight	6.5 kg
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-40°C ~ +70°C
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	100K hrs min- MIL-HDBK-217F (25°)