

# KI-X00SC80CS


## Smart Curium Series

### IP Camera

\*نکته: این محصول بدون پایه ارائه می گردد.



2021-Q2

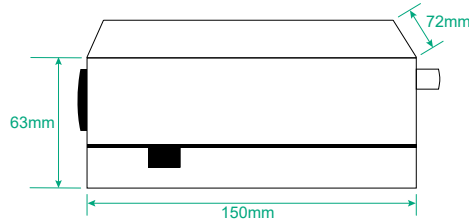

#### سایر برتریها:

- پشتیبانی از میکرو SD با ظرفیت 256Gb
- بدنه ضد آب و گرد و غبار با درجه IP44
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.4
- قابلیت WDR, BLC, HLC, Defog

#### قابلیت‌های هوشمند:

- عبور از خط
- ورود به منطقه
- تشخیص حرکت

## 5 years Gold Guarantee

- پنج سال گارانتی طلایی بدون قید و شرط کی دی تی
- شش سال ضمانت پایداری کیفیت تصویر

Camera	
Image Sensor	<b>8MP Super Starlight (Sony-Japan) Cmos Sensor (1/1.8")</b>
CPU	<b>Dual-Core ARM 2 x A53@1400MHz</b>
Lens	CS Mount - F:DC Iris/Auto Iris/Fixed Iris
Resolution	<b>3840*2160 (8MP)</b>
Available IR Range	N/A
D/N Filter	IR Cut Filter Switch (ICR)
Min Illumination	Color: <b>0.0001 Lux</b> (AGC on) - B/W: 0.0002 Lux(AGC on)
Angle of View	<b>Depend On Lens</b>
StarLight View	Yes-Color / Super Starlight
Picture Adjust	
Picture Function	<b>120db WDR, DWDR, BLC, HLC, Defog, ROI</b>
Shutter Speed	Manual (1/3 ~ 1/100.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ ( <b>Ultra H.265</b> )
Audio Compression	G.711A, G.711U
Frame Rate(60Hz)	<b>30fps@8MP (WDR ON)</b>
Transmission Stream	<b>Triple Stream</b> (Code Rate: 128kb-16mb)
Network	
Protocols	HTTPs, HTTP, <b>TCP/IP V4-V6</b> , ICMP, RTSP, UDP, NTP, DHCP,DDNS, FTP, SNMP-V1-V2-V3, UPNP, <b>SIP</b> , NAT
Compatibility	<b>Onvif Ver2.4</b> , Profile S, CGI, SDK, API
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Recording Software	Unlimited KDT CMS/VMS 128CH Per Monitor

Function	
Recording	FTP, NVR, CMS, NAS, SD Card
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Alarm Out, Buzzer, Pop up, Show Message
Intelligent Function	<b>3 Smart Function</b> Line Crossing, Entering The Area, Motion Detection
Interface	
Network	RJ45(10/100mbps)+ <b>LED Indicator on Port</b>
Audio	Audio Out, Audio In
Alarm	Alarm Out, Alarm In
CVBS	Yes
Power	<b>PoE LAN, DC In</b>
Control	RS485
Memory Slot	Yes - Micro SD ( <b>256Gb Max</b> )
General	
IP Rating	IP44 (Without Case) -
Power Supply	DC12V ± 25% - <b>AC24V ± 25%</b>
POE Supply	<b>IEEE802.3af-Max 8W(0.166A)</b>
Web Language	English, <b>Persian</b>
Dimension	150*72*63 mm
Weight	636 g
Operation Humidity	<b>Indoor: Up to 90%RH / Outdoor: Depend On Cover</b>
Operation Temp	<b>Indoor: -35°C ~ +65°C / Outdoor: Depend On Cover</b>
Guarantee	
Product Guarantee	5 Years Gold Guarantee
MTBF	100K hrs min- MIL-HDBK-217F (25°)