

Overview

WS-C3850-48XS-S switch provides 48 ports 10Gbps SFP+ connection with upgradeable IP base image and build in wireless controller provide fully convergence between wired and wireless on a single platform.

Quick Specs

Table 1 shows the Quick Specs.


Product Code	WS-C3850-48XS-S
Enclosure Type	1 RU
Feature Set	IP Base
Ports	48 x 10/100/1000 10G SFP+ Optical ports
Maximum stacking number	9
Stack bandwidth	480 Gbps
Switching Capacity	1280 Gbps
RAM	8 GB
Flash Memory	8 GB
Dimensions	4.45 X 44.5 x 51.1 cm

Product Details

Figure 1 shows the appearance of the Cisco Catalyst WS-C3850-48XS-S.



Figure 2 shows the back panel of the WS-C3850-48XS-S switch.

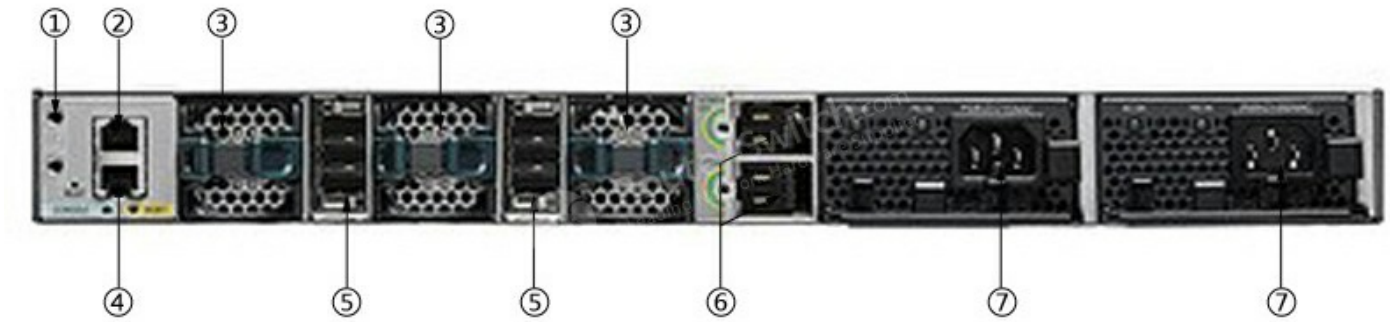

Note

(1)	Ground connector	(5)	StackWise port connector
(2)	CONSOLE (RJ-45 console port)	(6)	StackPower connector
(3)	Fan module	(7)	Power supply modules
(4)	MGMT port		

Compare to Similar Items

Table 2 shows the comparison between WS-C3850-12XS-S and WS-C3850-48XS-S.

Models	WS-C3850-12XS-S	WS-C3850-48XS-S
Feature Set	IP Base	IP Base
Ports	12 ports of 10G SFP+ Ethernet fiber connection with Flexible Netflow feature	48 ports of SFP Ethernet fiber connection with Flexible Netflow feature
Network SFP uplink module selection	C3850-NM-4-10G	None

Switch to Something New

[Why Upgrade to Catalyst 9300?](#) | [See the Catalyst 9300 Series](#)

Get more information

Do you have any question about the WS-C3850-48XS-S?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

WS-C3850-48XS-S Specification	
model info:	WS-C3850-48XS-S
enclosure type	Rack-mountable - 1U
Ports	48 x SFP+ ports
Network management Interface	● Ethernet management port: RJ-45 connectors, 4-pair Cat-5 UTP cabling ● Management console port: RJ-45-to-DB9 cable for PC connections

Available PoE Power	None
Switching Capacity	1280 Gbps
Maximum stacking number	9
FNF entries	96,000 flows
Maximum VLANs IDs	1,000
MAC Address Table Size	32K
CPU	Multicore CPU
RAM	8 GB
Flash Memory	8 GB
Wireless	
Number of AP per switch/stack	100
Number of wireless clients per switch/stack	2000
Total number of WLANs per switch	64
Wireless bandwidth per switch	Up to 40 Gbps
Supported Aironet AP series	3600, 3500, 2600, 1600, 1260, 1140, 1040
Expansion / Connectivity	
Console ports	USB (Type-B), Ethernet (RJ-45)
Expansion Slot(s)	1 network module slot and 1 power redundant slot
Power supply	PWR-C3-750WAC-R
Power Device	Power supply - redundant - plug-in module
Power Redundancy	optional
Miscellaneous	
Dimension	4.45 X 44.5 x 51.1 cm (1.75 x 17.5 x 20.1 inch)
Weight	7.45 kg
Rack Mounting Kit	optional
MTBF in hours	286,900
Compliant Standards	● IEEE 802.1D Spanning Tree Protocol ● IEEE 802.1p CoS Prioritization ● IEEE 802.1Q VLAN ● IEEE 802.1s ● IEEE 802.1w ● IEEE 802.1X ● IEEE 802.1X-Rev ● IEEE 802.11 ● IEEE 802.1ab (LLDP) ● IEEE 802.3ad ● IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports ● IEEE 802.3 10BASE-T ● IEEE 802.3u 100BASE-TX ● IEEE 802.3ab 1000BASE-T ● IEEE 802.3z 1000BASE-X ● RMON I and II standards ● SNMP v1, v2c, and v3
System software / license	

System software	IOS IP Base (Upgradable)
EnergyWise license	ENERGY-MGMT, ENERGY-MGT-100-K9
Features	●RPS Support ● Jumbo Frames ● VLANs ●Voice Vlan ●VTPv2 ●CDPv2 ●LLDP ● 802.3ad LACP and PAgP ● PVST/PVST+ ● 802.1W/802.1S ●Port Fast/Uplink Fast ●Dynamic Trunking Protocol (DTP) ● port CoS Trust and Override ● Trusted Boundary ● ACL Classification ● ingress Policing ● Auto QoS ● Per VLAN policies ● 802.1p queues ● Scheduling ● Priority Queuing ● Configure CoS Priority Queues ●Configure CoS Priority Queues ● Configure Queue Weights ● Configure Buffers and Thresholds ●Class & Policy Maps ● Modify CoS and DSCP Mapping ● Weighted Tail Drop ● IGMPv1,v2,v3 and MLDv1, v2 ● DHCP server ● DSCP transparency ● HSRP, VRRP, BGP ● RIPv1, v2 EIGRP, PIM OSPF, OSPFv3, EIGRPv6, BGPv4, IS-ISv4 ● VRF-lite ● PIM-SM/DM, - PIM sparse-dense mode, SSM ● Flexible Netflow
Advanced Network security	● Port security ● DHCP snooping ●Dynamic ARP inspection (DAI) ● IP source guard ●The Unicast Reverse Path Forwarding (uRPF) ● Bidirectional data support on a SPAN ● User authentication ● Private VLAN ●Router and VLAN ACLs ● complete identity and security ● Multidomain authentication ● MAC address notification ● IGMP filtering ● Cisco security VLAN ACL ● Secure Shell (SSH) Protocol, Kerberos, and Simple Network Management Protocol Version 3 (SNMPv3) ● Port-based ACLs ● TrustSec SXP ● IEEE 802.1ae ● TACACS+ and RADIUS authentication ● Cisco standard and extended IP security router ACLs ● Bridge protocol data unit (BPDU) Guard ● Spanning Tree Root Guard (STRG) ● Wireless end-to-end security

Management	●BRIDGE-MIB ●CISCO-AUTH-FRAMEWORK-MIB ●CISCO-BGP4-MIB, BGP4-MIB ●CISCO-BRIDGE-EXT-MIB ●CISCO-BULK-FILE-MIB ●CISCO-CABLE-DIAG-MIB ●CISCO-CALLHOME-MIB ●CISCO-CEF-MIB ●CISCO-CIRCUIT-INTERFACE-MIB ●CISCO-ENTITY-VENDORTYPE-OID-MIB ●CISCO-CONTEXT-MAPPING-MIB ●CISCO-DEVICE-LOCATION-MIB ●CISCO-DHCP-SNOOPING-MIB ●CISCO-EIGRP-MIB ●CISCO-EMBEDDED-EVENT-MGR-MIB ●CISCO-ENTITY-FRU-CONTROL-MIB ●CISCO-ENTITY-SENSOR-MIB ●ENTITY-MIB ●CISCO-ERR-DISABLE-MIB ●CISCO-CONFIG-COPY-MIB ●CISCO-FLOW-MONITOR-MIB ●CISCO-FTP-CLIENT-MIB ●CISCO-HSRP-EXT-MIB ●CISCO-HSRP-MIB ●CISCO-IETF-ISIS-MIB ●CISCO-IF-EXTENSION-MIB ●CISCO-IGMP-FILTER-MIB ●CISCO-CONFIG-MAN-MIB ●CISCO-IP-CBR-METRICS-MIB ●CISCO-IPMROUTE-MIB ●CISCO-IP-STAT-MIB ●CISCO-IP-URPF-MIB ●CISCO-L2L3-INTERFACE-CONFIG-MIB ●CISCO-LAG-MIB ●CISCO-LICENSE-MGMT-MIB ●CISCO-MAC-AUTH-BYPASS-MIB ●CISCO-MAC-NOTIFICATION-MIB ●CISCO-MDI-METRICS-MIB ●CISCO-FLASH-MIB ●CISCO-OSPF-MIB ●CISCO-OSPF-TRAP-MIB ●CISCO-PAE-MIB ●CISCO-PAGP-MIB ●CISCO-PIM-MIB ●CISCO-PING-MIB ●CISCO-PORT-QOS-MIB ●CISCO-PORT-SECURITY-MIB●CISCO-PORT-STORM-CONTROL-MIB ●CISCO-POWER-ETHERNET-EXT-MIB ●CISCO-PRIVATE-VLAN-MIB ●CISCO-PROCESS-MIB ●CISCO-PRODUCTS-MIB●CISCO-RF-MIB ●CISCO-RTP-METRICS-MIB ●CISCO-RTTMON-MIB ●CISCO-SMART-INSTALL-MIB ●CISCO-SNMP-TARGET-EXT-MIB ●CISCO-STACKMAKER-MIB ●CISCO-MEMORY-POOL-MIB ●CISCO-STP-EXTENSIONS-MIB ●CISCO-SYSLOG-MIB ●CISCO-TCP-MIB ●CISCO-UDLDP-MIB ●CISCO-VLAN-IFTABLE-RELATIONSHIP-MIB ●CISCO-VLAN-MEMBERSHIP-MIB ●CISCO-VTP-MIB ●EtherLike-MIB ●HC-RMON-MIB ●IEEE8021-PAE-MIB ●IEEE8023-LAG-MIB ●IF-MIB ●IGMP-MIB ●IGMP-STD-MIB ●IP-FORWARD-MIB ●IP-MIB ●IPMROUTE-STD-MIB ●LLDP-EXT-MED-MIB ●LLDP-MIB ●NOTIFICATION-LOG-MIB ●OLD-CISCO-MEMORY-MIB ●CISCO-CDP-MIB ●POWER-ETHERNET-MIB ●RMON2-MIB ●RMON-MIB ●SNMP-COMMUNITY-MIB ●SNMP-FRAMEWORK-MIB ●SNMP-MPD-MIB ●SNMP-NOTIFICATION-MIB ●SNMP-PROXY-MIB ●SNMP-TARGET-MIB ●SNMP-USM-MIB ●SNMPv2-MIB ●SNMP-VIEW-BASED-ACM-MIB ●TCP-MIB ●UDP-MIB ●CISCO-IMAGE-MIB ●CISCO-STACKWISE-MIB ●AIRESPMACE-WIRELESS-MIB ●CISCO-LWAPP-IDS-MIB ●CISCO-LWAPP-AP-MIB ●CISCO-LWAPP-CCX-RM-MIB ●CISCO-LWAPP-CLIENT-ROAMING-MIB ●CISCO-LWAPP-DOT11-CCX-CLIENT-DIAG-MIB ●CISCO-LWAPP-DOT11-CCX-CLIENT-MIB ●CISCO-LWAPP-DOT11-CLIENT-CCX-REPORTS-MIB ●CISCO-LWAPP-DOT11-CLIENT-MIB ●CISCO-LWAPP-DOT11-MIB ●CISCO-LWAPP-DOWNLOAD-MIB ●CISCO-LWAPP-LINKTEST-MIB ●CISCO-LWAPP-MFP-MIB ●CISCO-LWAPP-MOBILITY-EXT-MIB ●CISCO-LWAPP-QOS-MIB ●CISCO-LWAPP-REAP-MIB ●CISCO-LWAPP-ROGUE-MIB ●CISCO-LWAPP-RRM-MIB ●CISCO-LWAPP-SI-MIB ●CISCO-LWAPP-TSM-MIB ●CISCO-LWAPP-WLAN-MIB ●CISCO-LWAPP-WLAN-SECURITY-MIB
Technical Support and Services	● Cisco SMARTnet Service ● Cisco Smart Foundation Service ● Cisco SP Base Service ● Cisco Focused Technical Support Services
Environmental Ranges	
With AC power supply Operating environment and altitude	
Operating temperature up to 5000 ft (1500 m)	23°F to 113°F (-5°C to +45°C)
Operating temperature up to 10,000 ft (3000 m)	23°F to 104°F (-5°C to +40°C)
Short-term exception at sealevel with single fan failure	23°F to 113°F (-5°C to +45°C)
Short-term exception up to 5000 feet (1500 m)	23°F to 122°F (-5°C to 50°C)

Short-term exception up to 10,000 feet (3000 m)	23°F to 113°F (-5°C to 45°C)
With DC power supply Operating environment and altitude (NEBS)	
Operating temperature up to 6000 ft (1800 m)	23°F to 113°F (-5°C to +45°C)
Operating temperature up to 10,000 ft (3000 m)	23°F to 104°F (-5°C to +40°C)
Operating temperature up to 13,000 ft (4000m)	23°F to 95°F (-5°C to 35°C)
Short-term exception up to 6,000 feet (1800 m)	23°F to 131°F (-5°C to +55°C)
Short-term exception up to 10,000 feet (3000 m)	23°F to 122°F (-5°C to +50°C)
Short-term exception up to 13,000 feet (4000 m)	23°F to 113°F (-5°C to +45°C)
Short-term exception at sealevel with single fan failure	23°F to 113°F (-5°C to +45°)
Storage environment	-40°F to 160°F (-40°C to 70°C)
Operating altitude	Up to 13,000 Feet (Up to 4000 Meters)
Storage altitude	Up to 15,000 Feet (Up to 4573 Meters)
Operating relative humidity	10% to 95% noncondensing
Storage relative humidity	10% to 95% noncondensing

Want to Buy

Order Now

Get a Quote

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com